


# Technical data Hydraulic lift crane

# LR 1300 SX

Litronic®


Complies with ANSI B 30.5

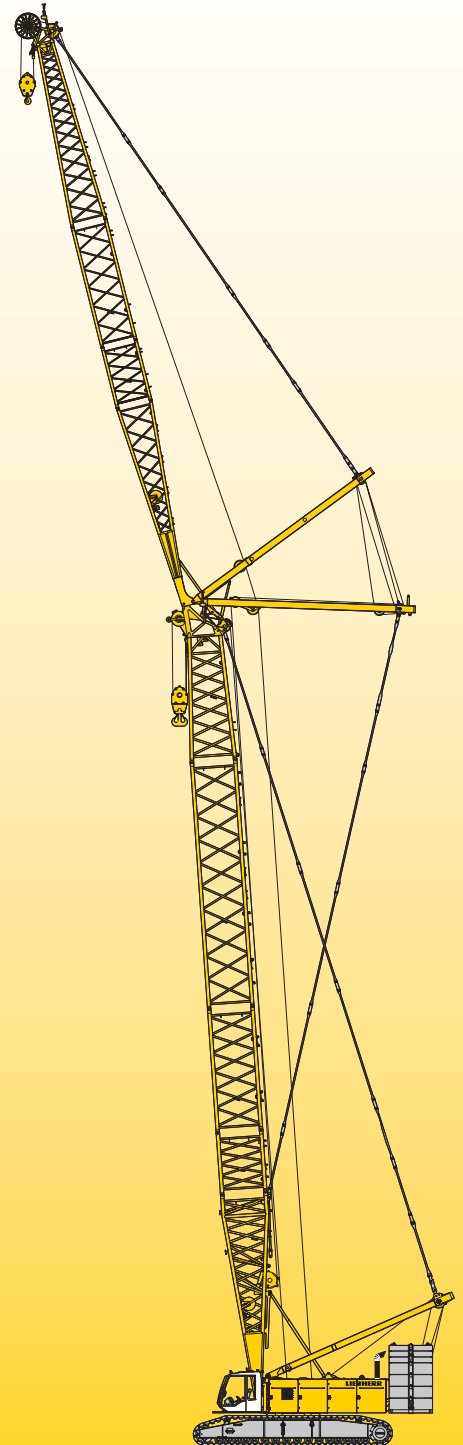

# LIEBHERR

# Dimensions

## Basic machine with undercarriage

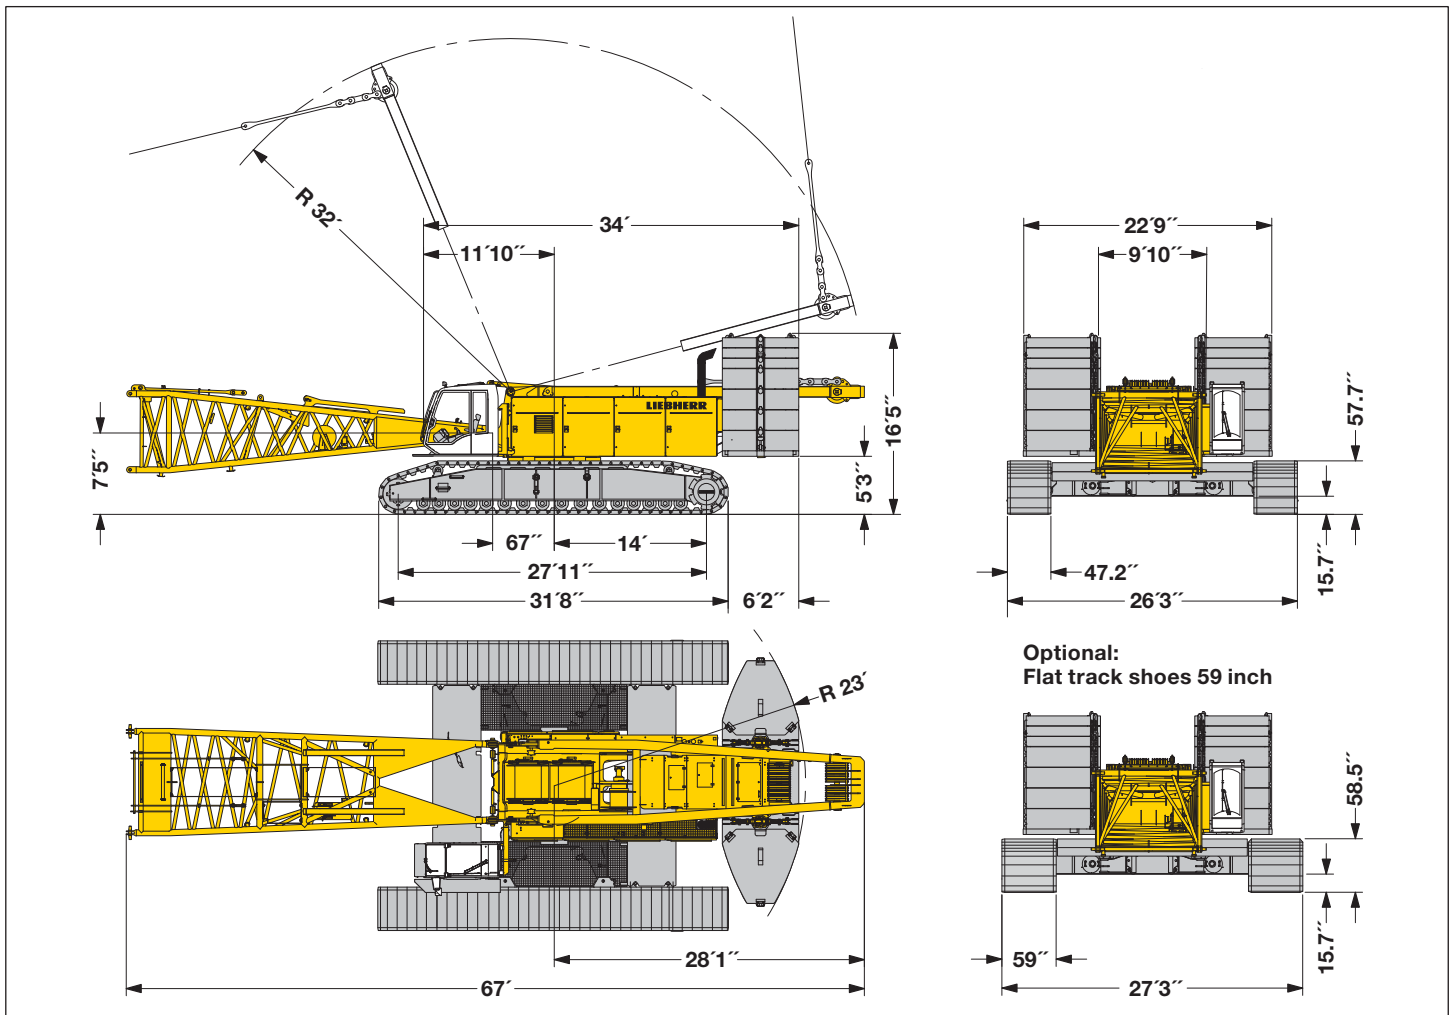

## Operating weight

The operating weight includes the basic machine with crawlers, 2 main winches 150 kN and 66 ft main boom, consisting of A-frame, boom foot (33 ft), boom head (23 ft), boom extension (10 ft), 273,400 lbs basic counterweight, 125,700 lbs carbody counterweight and 661,400 lbs hook block.

Total weight \_\_\_\_\_ approx. 639,340 lbs

## Ground pressure

Ground bearing pressure \_\_\_\_\_ 20.6 PSI

## Equipment



Main boom (No. 2821.xx) max. length \_\_\_\_\_ 302 ft  
 Luffing jib (No. 2316.xx) max. length \_\_\_\_\_ 371 ft  
 Max. combination \_\_\_\_\_ main boom 184 ft and luffing jib 371 ft  
 Auxiliary jib \_\_\_\_\_ 79,400 lbs

## Remarks

1. The lifting capacities stated are valid for lifting operation only (corresponding with crane classification according to F.E.M. 1.001 crane group A1).
2. Crane standing on firm, horizontal ground.
3. The weight of the lifting device (hoisting ropes, hook block, shackle etc.) must be deducted from the gross lifting capacity to obtain a net lifting value.
4. Additional equipment on boom (e.g. boom walkways, auxiliary jib) must be deducted to get the net lifting capacity.
5. For max. wind speed please refer to lift chart in operator's cab or manual.
6. Working radii are measured from center of swing and under load.
7. The lifting capacities are valid for 360 degrees of swing.
8. Calculation of stability under load is based on ISO 4305 Table 2 and SAE J987.
9. Loads for calculation of structures are according to SAE J987 in correspondence with F.E.M. 1.001 - 1998

# Transport dimensions and weights

## Basic machine and boom (No. 2821.xx)

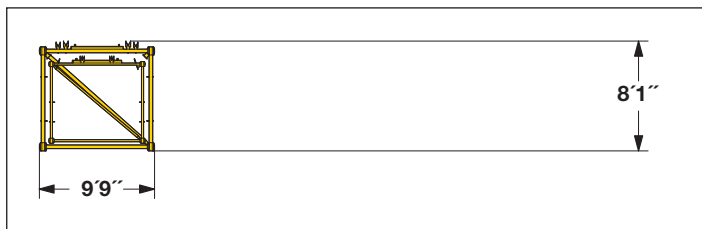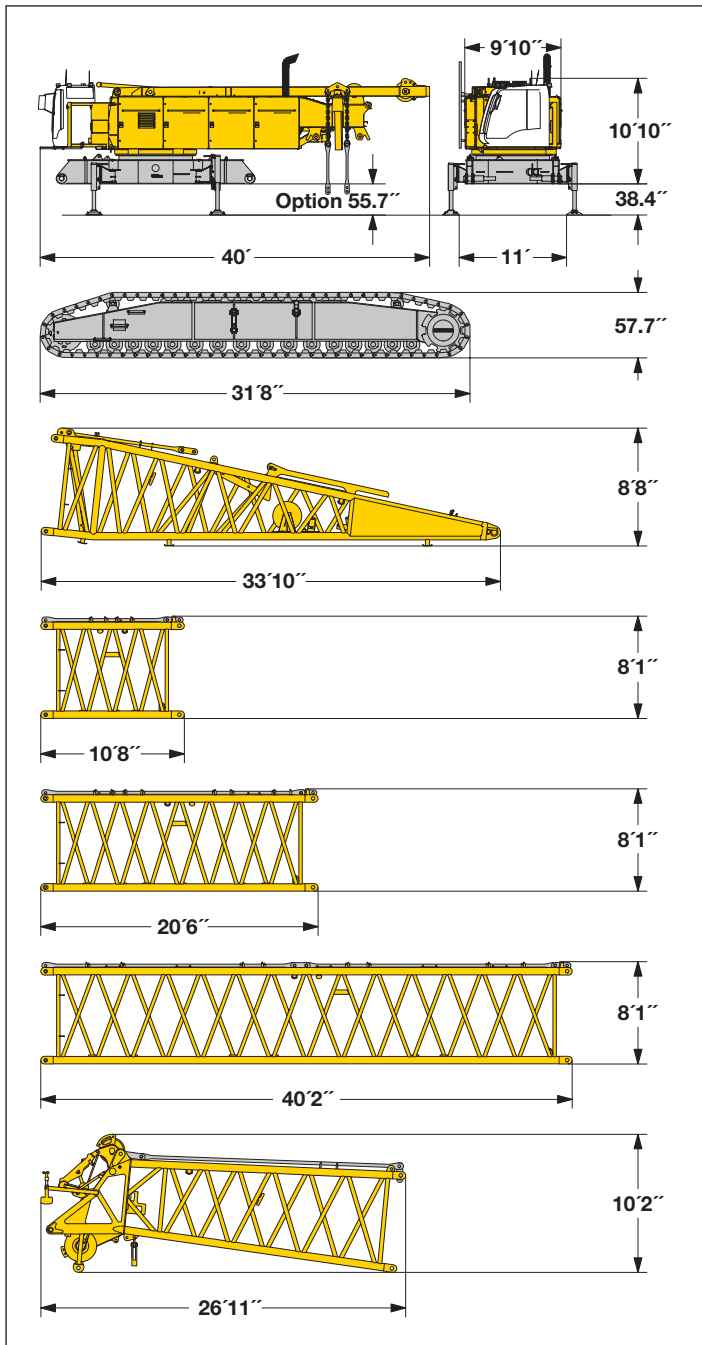

### Basic machine

with A-frame, 2x 150 kN crane winches, without boom foot, hoisting ropes, basic counterweight and crawlers

Width	9'10"
Weight excluding hoist ropes	99,210 lbs
Weight including hoist ropes (2x 2,182 ft)	103,620 lbs

### Crawler

	Optional	Standard
Flat track shoes	59 inch	47.2 inch
Width	59 inch	55.1 inch
Weight	57,800 lbs	49,300 lbs

### Boom foot (No. 2821.30)

Width	9'9"
Weight without winch	12,600 lbs
Weight incl. winch and rope	16,320 lbs

### Boom section (No. 2821.30) 10 ft

Width	9'9"
Weight with main boom pendants	3,100 lbs
Weight with main boom and luffing jib pendants	3,310 lbs

### Boom section (No. 2821.30) 20 ft

Width	9'9"
Weight with main boom pendants	4,700 lbs
Weight with main boom and luffing jib pendants	5,100 lbs

### Boom section (No. 2821.30) 40 ft

Width	9'9"
Weight with main boom pendants	8,300 lbs
Weight with main boom and luffing jib pendants	9,100 lbs

### Boom head (No. 2821.24)

Width	9'9"
Weight with main boom pendants	11,900 lbs


### Boom - luffing jib transport option

No. 2821.xx/2316.xx	40/40	20/20	10/10 ft
Length	41'	20'6"	10'8"
Weight*	13,050	7,275	4,650 lbs

\*) Including pendants

# Transport dimensions and weights

## Luffing jib (No. 2316.xx)

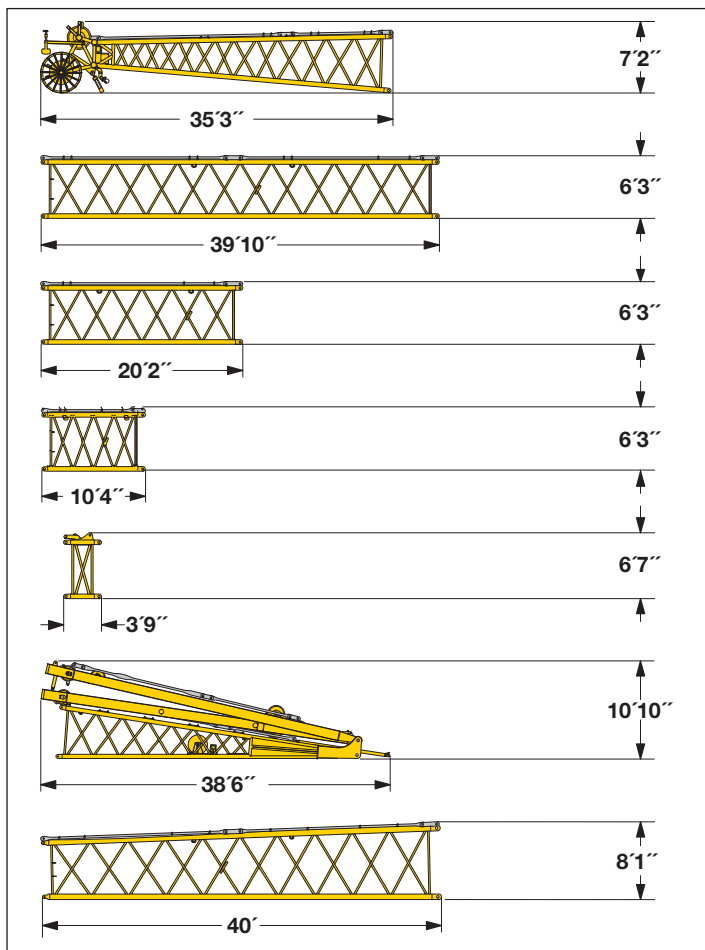

\*) including pendant straps

### Luffing jib head (No. 2316.20)

Width	8'
Weight*	5,070 lbs

### Luffing jib section (No. 2316.20) **40 ft**

Width	8'
Weight*	3,970 lbs

### Luffing jib section (No. 2316.20) **20 ft**

Width	8'
Weight*	2,100 lbs

### Luffing jib section (No. 2316.20) **10 ft**

Width	8'
Weight*	1,350 lbs

### L-boom jib section (No. 2316.20) **39.4 inch**

Width	8'
Weight*	1,410 lbs


### Luffing jib foot with A-frames (No. 2316.22)

Width	8'9"
Weight*	17,770 lbs

### L - boom section tapered (No. 2821/2316.24) **40 ft**

Width	9'9"
Weight*	5,950 lbs

## Fixed jib (No. 0906.21)

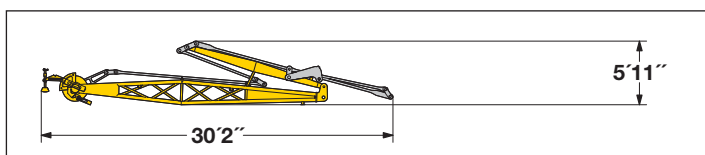


\*) including pendants

### Fixed jib (No. 0906.21)

Width	4'11"
Weight*	5,300 lbs

## Fixed jib (No. 1507.20)

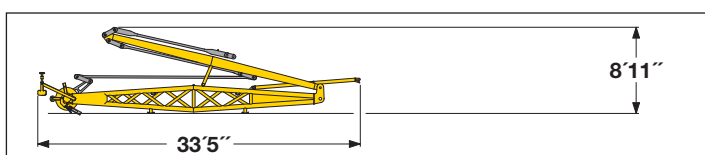


\*) including carbon fibre pendants

### Fixed jib (No. 1507.20)

Width	8'1"
Weight*	7,275 lbs

# Transport dimensions and weights

## Counterweights

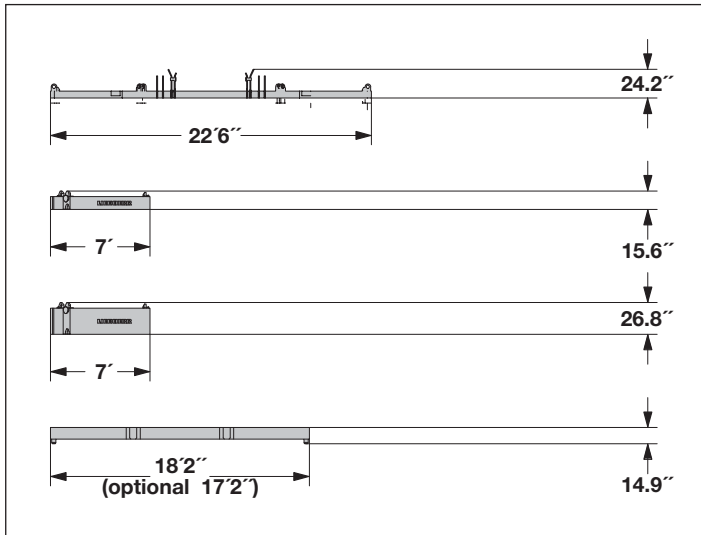

### Counterweight 1x

Width	6'11"
Weight	32,000 lbs

### Counterweight 6x

Width	6'11"
Weight	11,050 lbs


### Counterweight 8x

Width	6'11"
Weight	22,050 lbs

### Carbody counterweight 4x

	Optional	Standard
Width	5'	4'
Weight	29,550 lbs	31,420 lbs

## Hooks

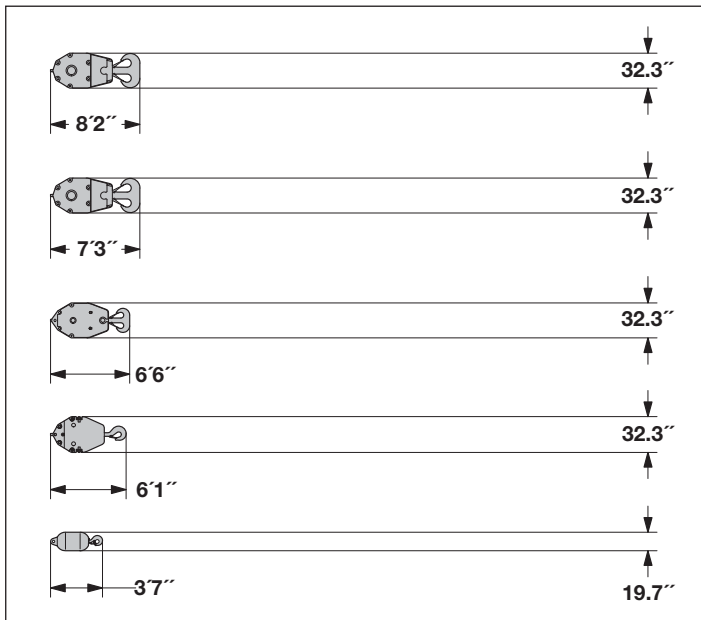

### 300 t hook block - 11 sheaves

Width	34.6"	48.4"
Weight	7,050	12,130 lbs

### 150 t hook block - 5 sheaves

Width	19.7"	26"	32.3"
Weight	3,500	6,200	8,800 lbs

### 100 t hook block - 3 sheaves

Width	13.4"	18.9"	24.4"
Weight	2,400	4,500	6,600 lbs

### 50 t hook block - 1 sheave


Width	11"	16.1"	21.3"
Weight	1,800	3,500	5,300 lbs

### 16 t single hook

Width	19.7"
Weight	2,000 lbs


# Dimensions (optional)

## Basic machine with w-undercarriage

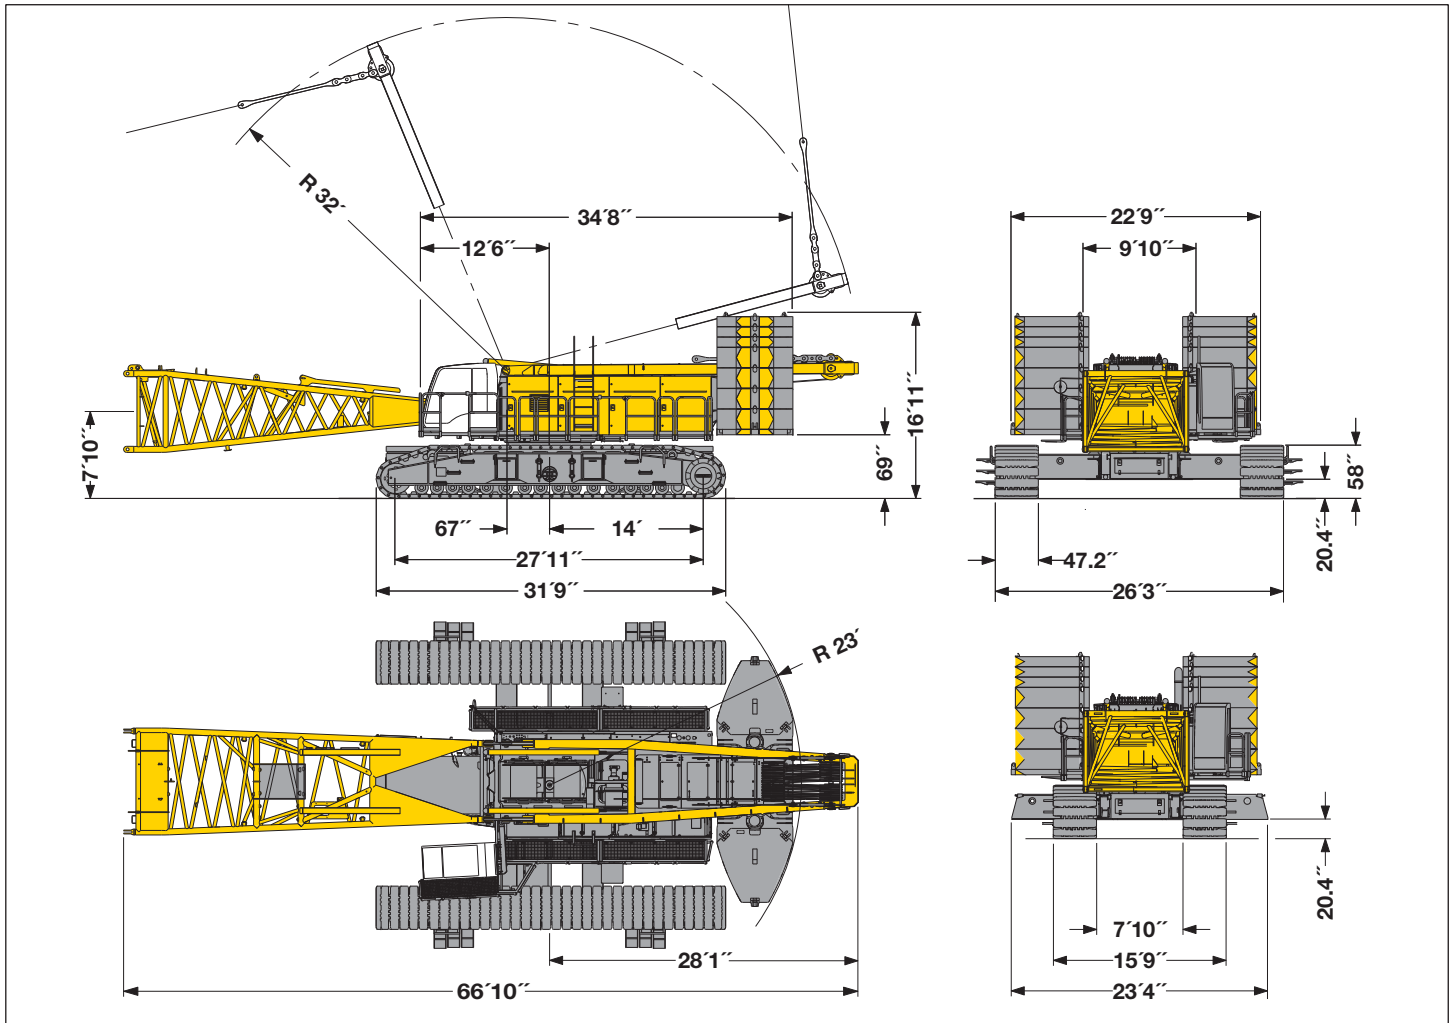

# Transport dimensions and weights (optional)

## Basic machine

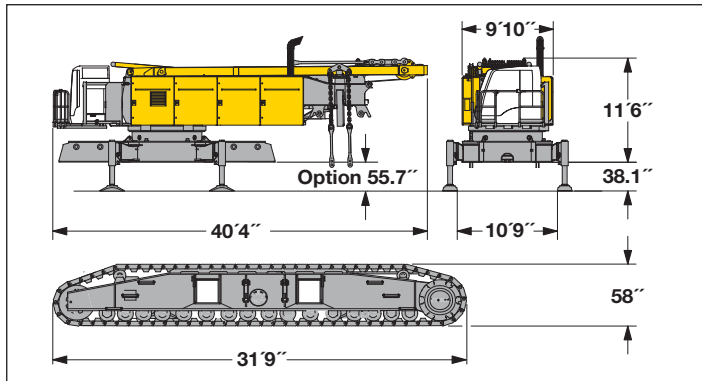

### Basic machine


with A-frame, 2x 33,720 lbf crane winches, without boom foot, hoisting ropes, basic counterweight and crawlers

Width	9'10"
Weight	102,515 lbs

### Crawler

Flat track shoes	47.2"
Width	47.2"
Weight	50,410 lbs

## Carbody counterweights (optional)

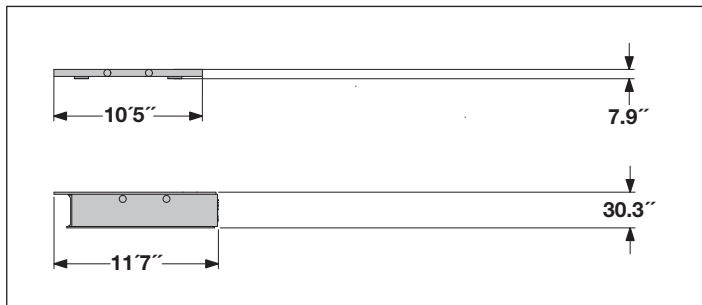

### Carbody counterweight **2x**

Width	5'11"
Weight	13,670 lbs

### Carbody counterweight **2x**

Width	5'11"
Weight	44,315 lbs

# Boom combinations



Main boom No.2821.xx — 302 ft

Max. combination — 295 ft

Max. combination — 298 ft

Max. combination — 555 ft

Main boom No. 2821.xx — 272 ft  
Fixed jib No. 0906.21 — 23 ft

Main boom No. 2821.xx — 272 ft  
Fixed jib No. 1507.21 — 26 ft

Main boom No. 2821.xx — 184 ft  
Luffing jib No. 2316.xx — 371 ft

Max. combination — 348 ft

Main boom No. 2821.xx — 223 ft  
Luffing jib No. 2316.xx — 125 ft



# Technical description



## Engine

Power rating according to ISO 9249. 450 kW (603 hp) at 1900 rpm  
Engine type \_\_\_\_\_ Liebherr D 9508 A7  
Fuel tank \_\_\_\_\_ 900 l capacity with continuous level indicator and reserve warning  
Engine complies with NRMM exhaust certification EPA / CARB Tier 3 and 97/68 EC Stage III.



## Hydraulic system

An axial displacement pump supplies the open loop hydraulic system for boom luffing, jib luffing and travel. The main hoist winches and swing are operated in a closed loop system. All functions can be operated simultaneously. To minimize peak pressure an automatic working pressure cut-off has been installed. All filters are electronically monitored.  
The use of synthetic environmentally friendly (biodegradable) oils is possible.  
Working pressure \_\_\_\_\_ max. 5076 psi  
Oil tank capacity \_\_\_\_\_ 238 gal



## Luffing jib winch

Line pull \_\_\_\_\_ max. 23,600 lbf  
Rope diameter \_\_\_\_\_ 20 mm  
Jib luffing \_\_\_\_\_ 69 sec. from 15° to 78°



## Boom winch

Line pull \_\_\_\_\_ max. 48,800 lbf  
Rope diameter \_\_\_\_\_ 24 mm  
Boom up \_\_\_\_\_ 127 sec. from 15° to 86°



## Swing

Consists of rollerbearing with external teeth, swing drive with fixed axial piston hydraulic motor. spring loaded and hydraulically released multi-disc holding brake, planetary gearbox and pinion.  
Both swing modes are possible – speed control or free swing.  
A multi-disc holding brake acts automatically at zero swing motion.  
Swing speed from 0 – 1.8 rpm continuously variable.



## Main winches

Line pull (1st layer) \_\_\_\_\_ max. 48,350 lbf  
Line pull (7th layer) \_\_\_\_\_ 33,750 lbf  
Rope diameter \_\_\_\_\_ 28 mm  
Drum diameter \_\_\_\_\_ 28.7 inch  
Rope speed \_\_\_\_\_ 0 – 453 ft/min  
Rope capacity in 7 layers \_\_\_\_\_ 1,870 ft

The winches are outstanding in their compact design and easy assembly.  
Propulsion is via a planetary gearbox in an oil bath.  
Load support by the hydraulic system; additional safety factor provided by a spring loaded, multi-disc holding brake.  
The main winches use pressure controlled, variable flow hydraulic motors.  
This system features sensors that automatically adjust oil flow to provide max. winch speed depending on load.  
Option – winch with freefall system:  
Clutch and braking functions on the freefall system are provided by a compact designed, low wear and maintenance free multi-disc brake.



## Crawlers

Propulsion through axial piston motor, hydraulically released spring loaded multi-disc brake. crawler tracks, hydraulic chain tensioning device.  
Flat track shoes \_\_\_\_\_ 47.2 inch (optional 59.1 inch)  
Drive speed \_\_\_\_\_ 0 – 0.8 mph



## Control


The control system – developed and manufactured by Liebherr – is designed to withstand extreme environmental conditions such as temperature, vibration and electromagnetic interference and to meet all requirements that are needed in heavy duty crane operation. Complete machine operating data are shown on a high resolution display. Standard operational information is displayed by means of graphical symbols, fault indications are displayed in plain text (more than 15 languages available).  
The cranes are equipped with proportional control for all main movements, which can be carried out simultaneously.  
The crane is operated with 2 multi-directional joysticks. the right for winch I and boom, the left for winch II and swing control.  
Option:  
Bi-directional double T-levers for simultaneous boom and luffing jib operation.  
The crawlers are activated by the two foot pedals. Additionally, hand levers can be attached to the pedals.  
Remote control for assembly of counterweight and boom hinge pins.




## Noise emission

Noise emissions correspond with 2000/14/EC directive on noise emission by equipment used outdoors.


# Self assembly system

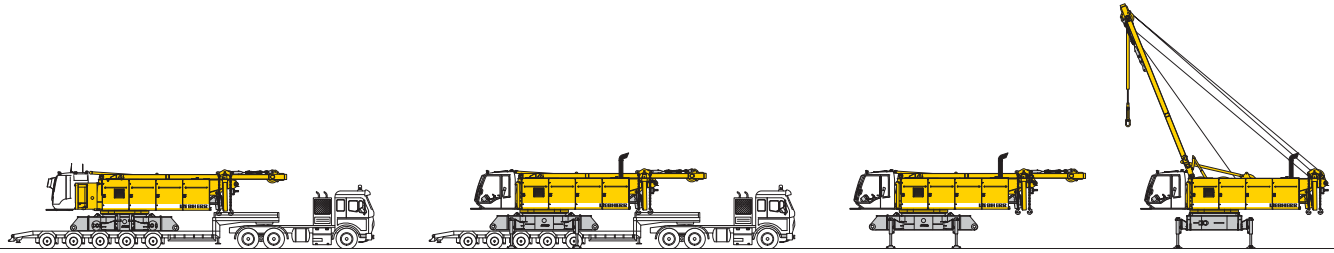

Unloading of basic machine

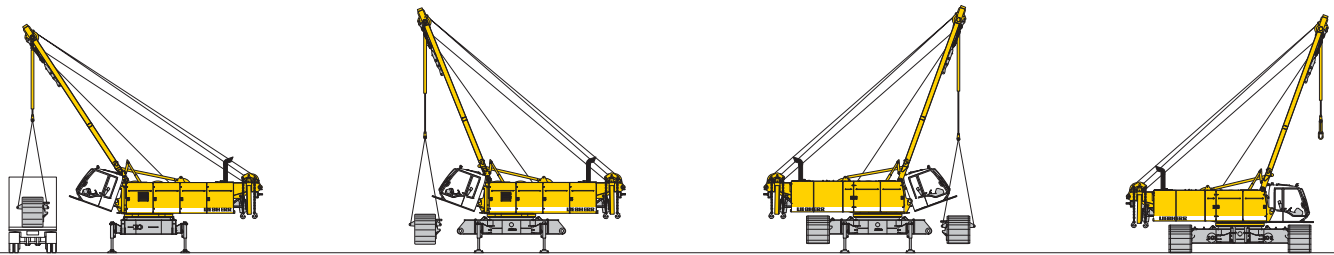


Unloading and assembly of crawlers

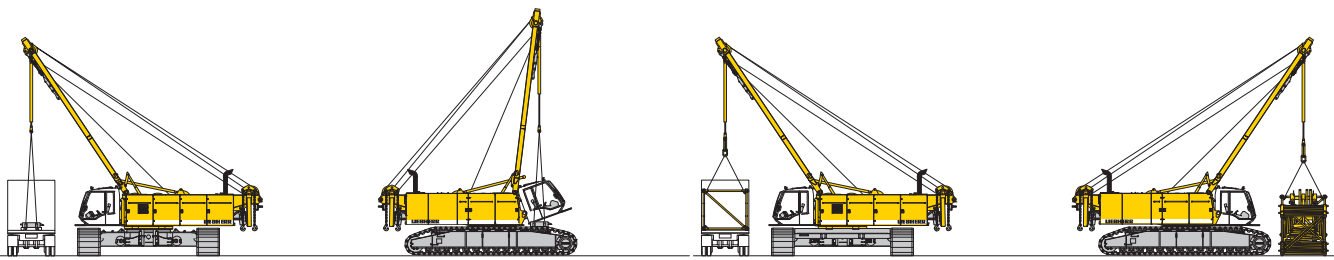

Unloading and assembly of carbody counterweight

Unloading and assembly of boom

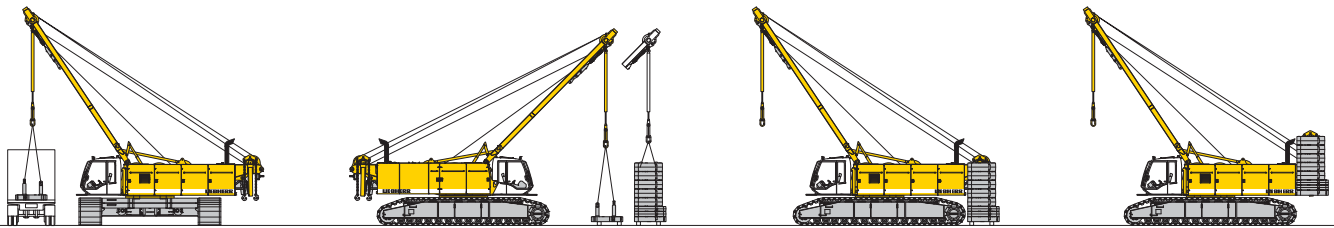


Unloading and assembly of counterweight




Unloading and assembly of boom foot

# Erecting of main boom to working position

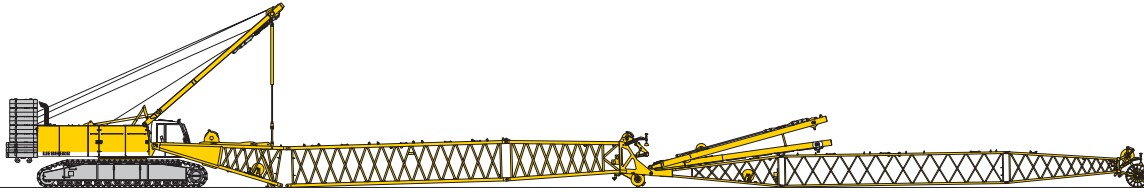


Assembly of boom

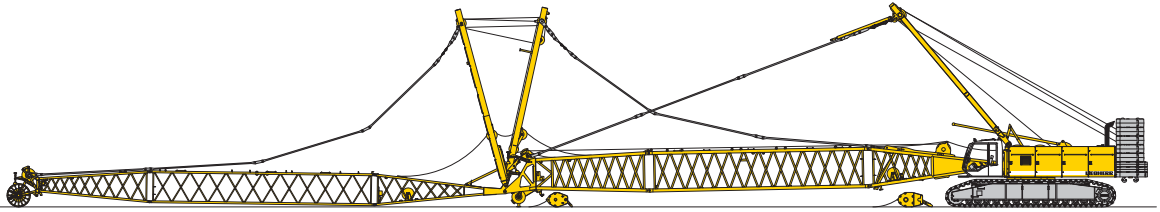

Reeving of hoist and luffing jib ropes




Erecting of main boom and luffing jib

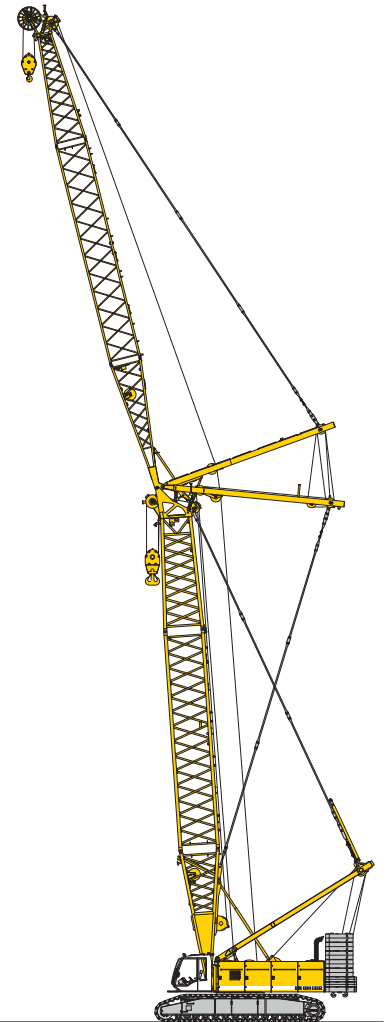

Working position

# Main boom (No. 2821.xx) 86° - 15°

## 273,400 lbs counterweight and 125,700 lbs carbody counterweight

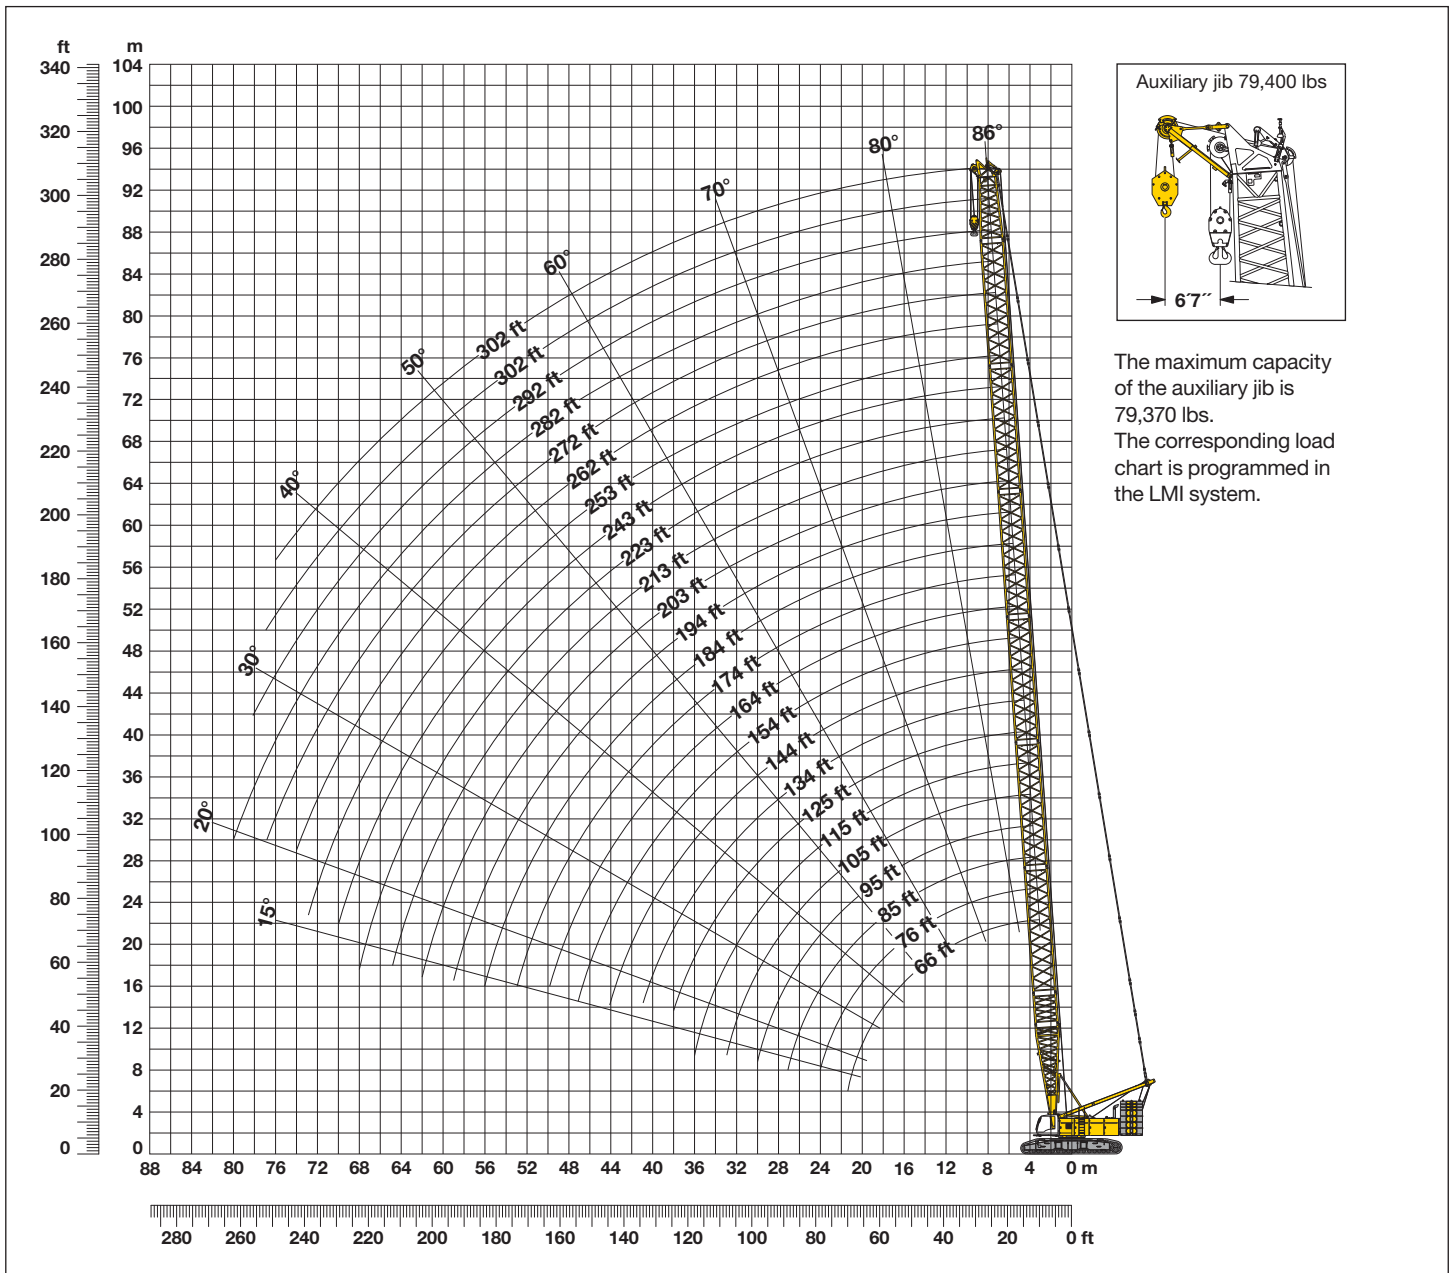

### Main boom configuration (No. 2821.xx)

Configuration for boom lengths between 66 ft and 302 ft

	Length	Amount of boom extensions																								
Boom foot	32.8 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1				
Boom insert	9.8 ft	1		1		1		1		1		1		1		1		1		1		1				
Boom insert	19.7 ft		1	1		1	1	1		1	1		1	1		1	1		1	1		1				
Boom insert	39.4 ft				1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6
Boom head	23 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Boom length (ft)		66	76	85	95	105	115	125	135	144	154	164	174	184	194	203	213	223	233	243	253	262	272	282	292	302

\*Actual lengths of boom sections are metric (e.g. 3m, 6m, 7m, 12m). The figures shown above are approximate conversions to feet.

# Lift chart for main boom (No. 2821.xx)

**229,300 lbs counterweight and 125,700 lbs carbody counterweight**

		Boom length in (ft)													
Radius	66	75	85	105	125	144	164	184	203	223	243	262	272	282	Radius
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	(ft)
15	662,4	662,4													15
20	578,7	578,3	577,1	574,4	570,0	526,0									20
25	459,0	458,7	457,5	456,4	454,5	453,0	447,4	430,7	369,5						25
30	379,1	378,8	377,7	376,7	374,7	373,3	371,2	369,6	344,9	326,4	291,8	249,7	242,4	227,7	30
40	274,0	274,4	274,2	274,3	273,8	273,4	271,4	269,7	265,7	259,2	252,7	239,8	235,6	222,8	40
50	198,5	198,8	198,6	198,5	197,8	197,3	196,4	195,7	194,7	193,9	190,0	185,4	183,1	180,7	50
60	154,0	154,4	154,1	154,1	153,3	152,6	151,6	150,8	149,7	148,8	147,7	146,4	144,5	142,5	60
70	33,4	125,0	124,8	124,8	123,9	123,2	122,1	121,2	120,1	119,1	117,9	116,9	116,3	115,7	70
80		33,4	103,9	104,0	103,1	102,4	101,3	100,3	99,1	98,1	96,9	95,8	95,2	94,5	80
90			33,4	88,4	87,6	86,9	85,7	84,8	83,5	82,4	81,2	80,0	79,4	78,8	90
105				71,1	70,4	69,8	68,6	67,6	66,4	65,2	63,9	62,8	62,1	61,4	105
125					54,4	53,9	52,8	51,8	50,5	49,4	48,0	46,8	46,2	45,4	125
145						42,5	41,6	40,6	39,3	38,2	36,8	35,6	35,0	34,2	145
165							33,2	32,5	31,2	30,1	28,7	27,5	26,9	26,1	165
185								25,9	24,7	23,7	22,3	21,1	20,5	19,7	185
200									20,7	19,7	18,4	17,2	16,5	15,8	200
220										15,2	13,9	12,8	12,1	11,4	220
240											10,2	9,1	8,5	7,7	240
260												5,9	5,3	4,6	260
270													3,9	3,2	270
275														2,4	275

TLT 10539958 M95738 official

# Lift chart for main boom (No. 2821.xx)

**273,400 lbs counterweight and 125,700 lbs carbody counterweight**

		Boom length in (ft)															
Radius	66	76	85	105	125	144	164	184	203	223	243	262	272	282	292	302	Radius
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	(ft)
21							480,4										21
25						453,8	447,4	430,7	369,5								25
30				398,1	389,6	384,3	379,7	370,3	344,9	326,4	291,8	249,7	242,4	227,7	214,8		30
35			345,3	341,5	338,1	332,7	326,1	322,4	314,7	300,7	278,3	245,7	240,7	227,0	214,8	198,8	35
40	300,7	300,5	299,4	298,4	295,0	291,9	289,2	281,4	274,6	271,7	267,1	239,8	235,6	222,8	210,8	195,5	40
50	224,7	225,0	224,7	224,7	224,0	223,4	222,5	221,8	220,3	215,0	209,5	201,4	203,2	197,9	193,5	183,8	50
60	174,7	175,1	174,9	174,8	174,0	173,3	172,3	171,5	170,4	169,5	168,4	167,4	166,2	163,9	161,6	155,6	60
65	153,6	157,2	156,9	156,8	156,0	155,3	154,3	153,4	152,3	151,3	150,2	149,2	148,6	148,0	146,2	143,9	65
70		142,2	142,0	141,9	141,1	140,4	139,3	138,4	137,3	136,3	135,1	134,1	133,5	132,9	132,4	130,9	70
80			118,6	118,6	117,8	117,1	115,9	115,0	113,8	112,8	111,5	110,4	109,8	109,2	108,7	108,1	80
105				81,8	81,2	80,5	79,3	78,4	77,1	76,0	74,7	73,5	72,9	72,2	71,6	71,0	105
125					63,2	62,7	61,6	60,6	59,3	58,2	56,9	55,6	55,0	54,3	53,7	53,0	125
145						50,0	49,1	48,1	46,9	45,7	44,4	43,1	42,5	41,7	41,2	40,5	145
165							39,6	38,8	37,6	36,5	35,1	33,9	33,4	32,7	31,9	31,2	165
185								31,6	30,5	29,4	28,1	26,9	26,2	25,5	24,9	24,2	185
200									26,0	25,0	23,7	22,5	21,8	21,1	20,5	19,8	200
220										20,0	18,8	17,6	16,9	16,2	15,6	14,9	220
240											14,6	13,5	12,9	12,1	11,6	10,8	240
260												9,9	9,4	8,4	7,7	6,6	260
270													7,6	6,5	5,8	4,7	270
280														4,6	4,0	2,9	280
285															3,1	2,0	285


TLT 10539958 M95738 official

Above lift chart is for reference only.

For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

# Working range - luffing jib (No. 2316.xx) 78° - 15°

Main boom 88° - 45°

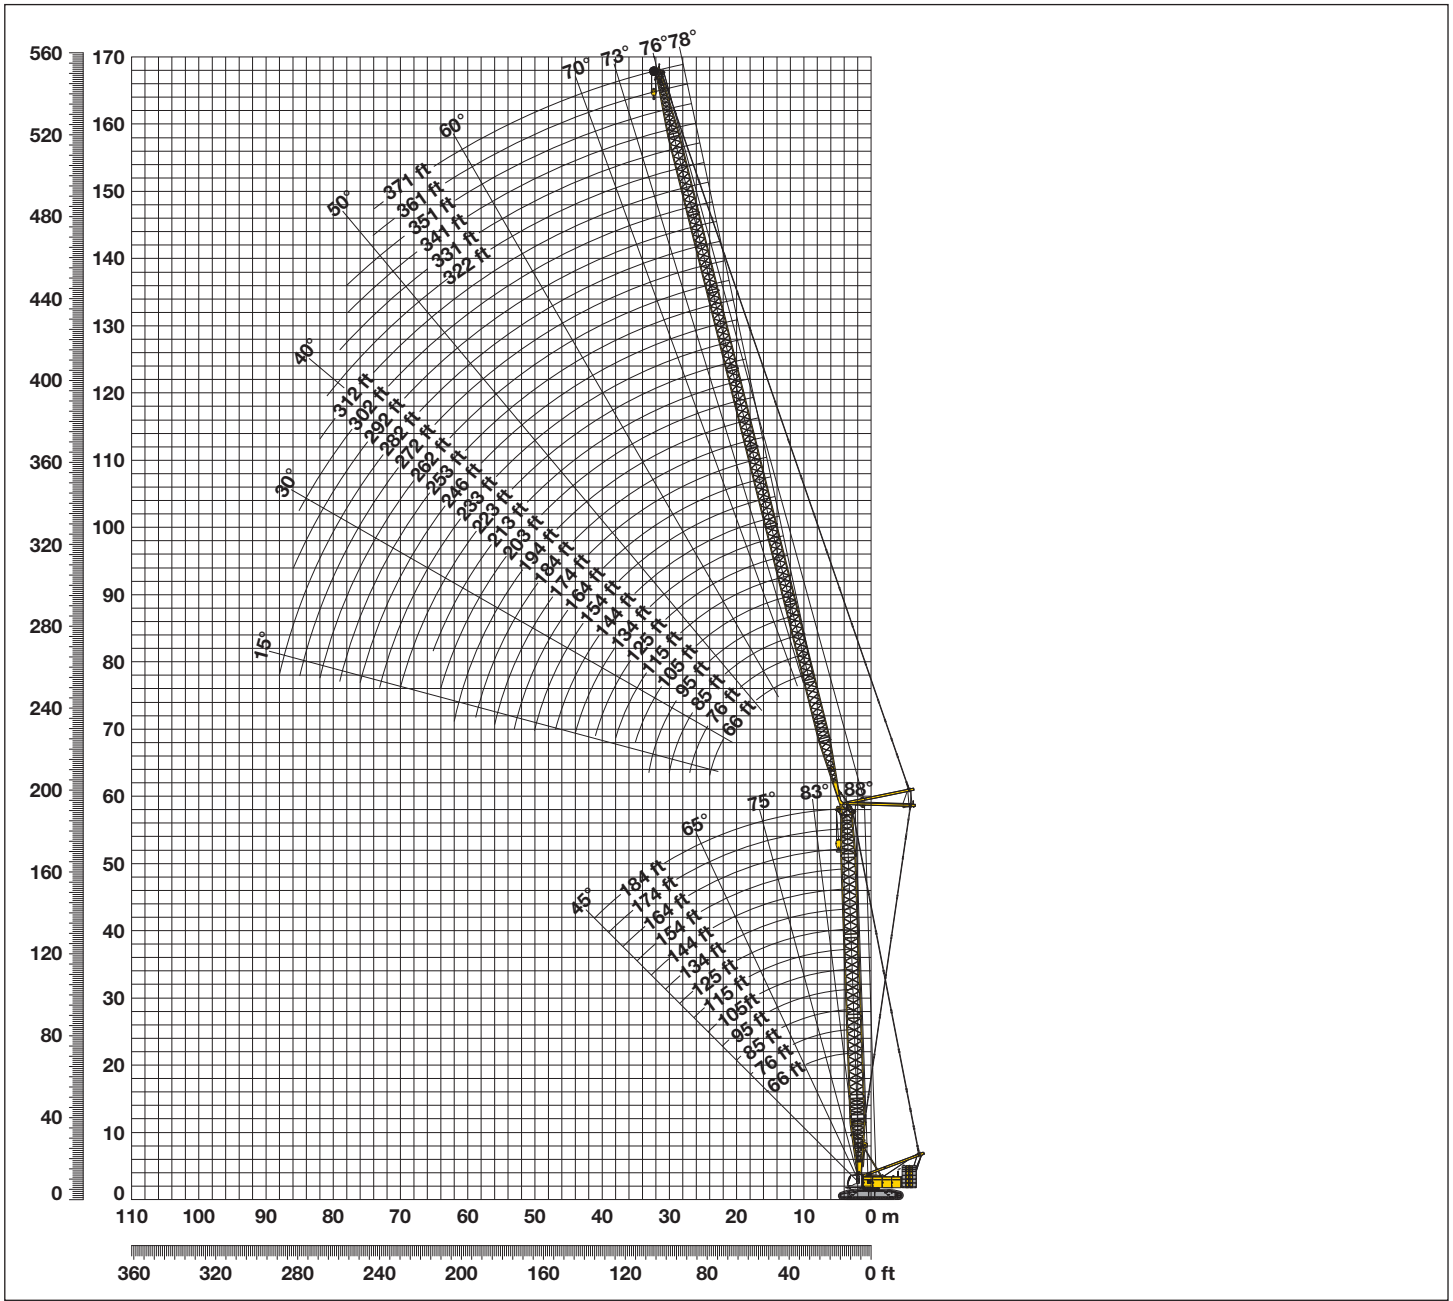

## Boom configuration for main boom lengths (66 ft - 223 ft) – see table on page 12 Jib configuration for jib lengths (66 ft - 371 ft)

Length	Amount of luffing jib extensions																																					
	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Luffing jib foot	32.8 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Luffing jib insert	9.8 ft		1		1		1		1		1		1		1		1		1		1		1		1		1		1		1		1		1		1	
Luffing jib insert	19.7 ft			1	1		1	1		1	1		1	1		1	1		1	1		1	1		1	1		1	1		1	1		1	1		1	1
Luffing jib insert	39.4 ft				1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	7	7	7	7	7	7
Luffing jib head	32.8 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Luffing jib length (ft)		66	76	85	95	105	115	125	134	144	154	164	174	184	194	203	213	223	233	243	253	262	272	282	292	302	312	322	331	341	351	361	371	371	371	371		

\*Actual lengths of boom sections are metric (e.g. 3m, 6m, 7m, 12m). The figures shown above are approximate conversions to feet.

# Lift chart - luffing jib (No. 2316.xx)

Main boom angle 88°

## Main boom 66 ft

Radius (ft)	Jib length in (ft)							
	66 lbs	135 lbs	174 lbs	213 lbs	253 lbs	292 lbs	331 lbs	361 lbs
40,6		207,1						
50		168,4	154,6					
60	139,4	131,1	128,3	110,3				
65	124,5	118,3	116,0	107,9				
70	108,3	106,3	103,9	100,4	80,6			
75		97,1	97,0	95,3	79,3	55,1		
85		84,6	81,1	79,2	75,5	53,9	39,0	
90		78,8	75,0	73,7	69,5	52,8	38,5	29,6
100		69,6	65,8	63,3	60,9	50,7	36,8	28,6
120		54,9	53,2	50,3	48,1	46,3	33,9	25,9
140		44,0	43,5	40,0	38,6	36,4	30,6	24,0
180			30,3	29,2	27,8	25,4	23,2	19,9
215				22,3	21,0	18,7	16,1	14,4
255					14,5	13,5	11,1	8,6
290						9,0	7,8	2,8
330							3,6	

## Main boom 105 ft

Radius (ft)	Jib length in (ft)							
	66 lbs	135 lbs	174 lbs	213 lbs	253 lbs	292 lbs	331 lbs	371 lbs
40	258,0							
45	258,0	201,7						
55	210,8	185,3	143,6					
60	185,0	175,2	140,8	102,9				
70	138,9	151,0	135,1	100,1	75,6			
75	113,5	140,2	132,5	98,5	74,7	50,4		
85		121,4	117,6	94,6	72,5	49,8	37,1	
95		106,0	103,8	90,0	69,9	48,5	36,3	26,2
120		76,1	78,1	73,3	63,9	45,3	32,6	23,7
140		54,5	63,1	60,8	59,2	42,7	30,4	21,8
180			37,1	42,8	43,0	37,0	26,7	18,8
215				28,0	31,5	30,7	24,3	17,0
255					19,6	22,4	19,2	14,9
295						12,0	14,1	5,1
310							11,1	2,1
330							7,0	

## Main boom 134 ft

Radius (ft)	Jib length in (ft)							
	66 lbs	135 lbs	174 lbs	213 lbs	253 lbs	292 lbs	331 lbs	371 lbs
28,7	258,0							
45	245,7	185,5						
55	207,6	178,3	133,9					
60	186,8	170,0	131,6	96,4				
70	147,5	151,3	126,3	94,5	70,4			
80		130,9	121,2	91,2	69,1	50,7		
85		121,5	114,6	89,3	68,3	50,2	35,9	
95		106,0	104,1	86,1	66,2	48,4	35,4	25,2
100		99,6	98,3	83,0	65,1	47,7	34,3	25,1
140		57,6	64,8	61,6	58,0	42,0	29,8	21,3
180			39,2	44,1	43,8	37,0	26,6	18,4
220				27,6	31,3	30,2	23,9	16,4
255					20,8	22,7	19,6	15,1
295						13,1	14,9	5,3
310							11,9	2,4
330							7,9	

## Main boom 184 ft

Radius (ft)	Jib length in (ft)							
	66 lbs	135 lbs	174 lbs	213 lbs	253 lbs	292 lbs	331 lbs	371 lbs
30,4	255,6							
45	227,6	147,6						
55	194,1	143,7	108,8					
65	166,1	133,9	105,3	81,2				
70	154,7	129,2	103,1	80,3	61,0			
80		121,0	99,4	78,0	60,2	45,9		
90		110,3	92,9	74,6	58,6	45,1	32,9	
95		105,3	90,1	73,5	57,5	44,4	32,7	23,4
120		79,8	77,2	66,0	52,8	41,5	29,8	21,7
145		54,5	62,1	57,2	48,7	38,5	27,5	19,6
180			41,0	44,7	42,6	34,8	24,9	17,6
220				28,6	31,8	29,6	22,5	15,8
260					19,0	22,4	18,7	14,0
295						13,4	15,7	5,7
310							12,7	2,8
335							7,6	

## Main boom 194 ft

Radius (ft)	Jib length in (ft)							
	66 lbs	135 lbs	174 lbs	213 lbs	253 lbs	292 lbs	331 lbs	341 lbs
30,8	240,6							
50	203,7	139,9						
55	187,7	136,2	104,5					
65	162,3	127,7	101,2	78,5				
70	151,4	123,5	99,0	77,8	59,3			
80		115,1	94,8	75,3	58,6	44,9		
90		106,1	88,9	72,1	57,0	44,5	32,5	29,6
120		79,7	74,0	63,5	51,4	40,8	29,7	27,2
140		61,4	64,2	57,1	48,2	38,3	27,9	25,4
145		55,5	61,5	55,7	47,2	37,8	27,4	25,1
180			41,7	44,5	40,9	33,9	24,8	22,6
220				29,1	31,9	29,0	22,4	20,4
260					19,1	22,7	18,8	17,6
295						13,7	15,4	14,8
335							7,7	8,4
345								6,4

## Main boom 213 ft Main boom 223 ft

Radius (ft)	Jib length in (ft)			
	66 lbs	135 lbs	174 lbs	203 lbs
31,5	214,0			
50	184,6	125,9		
55	173,5	122,5	95,9	
65	154,6	115,3	93,2	77,6
70	145,8	111,6	91,3	76,2
80		104,0	86,9	73,4
90		96,8	81,9	70,5
100		90,0	77,8	67,1
120		76,9	68,6	61,4
140		61,0	60,9	55,0
145		56,1	58,9	53,7
160			53,6	49,6
180			41,9	44,1
185			33,4	43,0
200				36,8
210				32,1

Jib length in (ft)	
Radius (ft)	lbs
44,1	128,9
50	126,8
60	119,1
70	111,0
80	104,0
85	99,4
90	95,4
95	92,0
100	89,1
105	85,6
110	82,3
115	79,3
120	76,8
125	72,3
130	67,0
135	61,6

TLT 10539958 M95738 official

Capacities in 1000 lbs with luffing jib (No. 2316.xx) 273,400 lbs counterweight + 125,700 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

# Lift chart - luffing jib (No. 2316.xx)

Main boom angle 83°

## Main boom 66 ft

Radius (ft)	Jib length in (ft)							
	66	135	174	213	253	292	331	361
37,7	258,0							
60	165,7	162,0						
70	129,7	128,6	120,9					
80	98,6	103,3	103,2					
85		94,8	96,0	94,6				
95		80,6	79,9	80,0	72,4			
105		70,9	69,2	68,3	67,4	49,6		
120		59,4	56,6	56,5	55,9	48,0	33,6	
125		56,7	54,0	53,2	51,9	47,1	33,3	24,6
145		46,2	44,4	41,9	40,8	38,8	31,0	23,2
185			32,1	30,0	29,0	26,2	25,1	20,2
220				23,6	21,8	19,5	17,2	14,9
260					15,9	14,1	11,8	8,9
295						10,3	8,4	2,6
300						9,8	7,9	
335							4,8	

## Main boom 105 ft

Radius (ft)	Jib length in (ft)							
	66	135	174	213	253	292	331	371
42,5	258,0							
65	166,5	164,2						
75	139,3	137,1	134,7					
85	115,2	117,4	116,0					
90		109,4	108,0	96,1				
100		96,2	94,8	91,9	70,4			
110		85,6	84,2	82,8	68,8	47,5		
125		73,2	71,9	70,4	65,6	46,1	32,4	
135		66,6	65,3	63,9	62,4	44,8	31,5	22,0
150		56,1	57,2	55,8	54,3	42,7	30,0	21,0
190			38,3	40,9	39,5	37,3	26,5	18,3
225				29,1	31,0	29,6	24,1	16,6
265					20,5	22,7	19,5	13,6
305						12,9	14,9	4,2
315							12,9	2,3
340							7,8	

## Main boom 134 ft

Radius (ft)	Jib length in (ft)							
	66	135	174	213	253	292	331	371
46,1	234,2							
70	150,3	147,7						
80	127,3	125,0	123,5					
90		108,1	106,6	92,5				
105		89,5	88,1	86,5	66,7			
115		80,1	78,7	77,1	65,3	46,3		
125		72,3	70,9	69,4	63,5	45,5	31,7	
140		62,9	61,6	60,1	58,5	43,5	30,8	21,3
155		55,3	54,2	52,7	51,2	41,7	29,4	20,3
190			41,6	40,3	38,8	37,2	26,5	18,0
230				29,5	29,5	28,0	23,9	16,1
270					20,9	21,5	19,6	13,1
280						20,2	18,6	10,6
305						14,7	15,8	5,0
320							13,2	2,1
345							8,1	

## Main boom 184 ft

Radius (ft)	Jib length in (ft)							
	66	135	174	213	253	292	331	371
52,1	195,3							
75	135,0	128,3						
85	115,7	113,2	104,0					
95	100,8	98,7	97,0					
100		92,7	91,1	81,0				
110		82,5	80,9	77,6	60,1			
120		74,2	72,6	71,0	59,1	42,7		
130		67,2	65,7	64,1	57,4	42,3		
145		58,7	57,3	55,7	53,3	40,7	29,6	
160		51,8	50,6	49,0	47,4	39,1	27,6	19,4
200			33,4	36,3	34,8	33,1	24,8	17,0
235				28,9	27,5	26,0	22,7	15,5
275					20,9	19,9	18,1	13,2
310						14,6	14,4	5,3
325							12,9	2,5
350							8,5	

## Main boom 194 ft

Radius (ft)	Jib length in (ft)							
	66	135	174	213	253	292	331	341
53,3	186,2							
75	134,3	123,8						
85	115,1	112,5	100,6					
95	100,3	98,1	96,2					
100		92,1	90,5	78,5				
110		82,0	80,4	75,9	58,6			
120		73,7	72,1	70,5	57,8	42,2		
135		63,8	62,3	60,7	55,6	41,4	29,3	26,5
140		60,9	59,5	57,9	53,9	40,8	29,2	26,5
160		51,5	50,2	48,7	47,1	38,7	27,5	25,1
200			37,4	36,1	34,5	32,4	24,8	22,6
235				28,6	27,2	25,7	22,7	20,6
275					21,1	19,7	17,6	17,0
315						14,0	13,7	13,1
350							8,7	8,9
360								7,3

## Main boom 213 ft Main boom 223 ft

Radius (ft)	Jib length in (ft)				Jib length in (ft)	
	66	135	174	203	Radius	125
55,7	170,9				(ft)	lbs
80	122,7	114,5			74,2	116,7
90	106,2	102,7	93,0		80	113,9
95	99,3	96,8	91,1		90	101,6
100		90,9	87,0	77,4	95	96,4
110		80,9	79,3	74,4	100	90,9
120		72,7	71,1	68,8	105	85,6
130		65,9	64,4	63,2	110	80,9
140		60,1	58,6	57,5	115	76,6
160		50,8	49,5	48,4	120	72,8
165		48,8	47,6	46,5	125	69,2
180			42,5	41,4	130	66,0
190			39,5	38,5	135	63,0
200			36,9	35,9	140	60,2
220				31,4	145	57,6
230				29,4	150	55,2
					155	53,0

TLT 10539958 M95738 official

Capacities in 1000 lbs with luffing jib (No. 2316.xx) 273,400 lbs counterweight + 125,700 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



# Lift chart - luffing jib (No. 2316.xx)

Main boom angle 75°

## Main boom 66 ft

Radius	Jib length in (ft)							
	66	135	174	213	253	292	331	361
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
60	181,2							
85	117,3	115,1						
105		85,0	84,2					
120		68,8	68,1	65,1				
135		58,9	55,7	55,7	50,2			
155		47,1	45,7	43,8	42,7	38,6		
170			40,0	37,8	36,3	34,5	28,3	
180			36,7	34,6	32,4	32,7	27,6	20,6
195			33,0	31,0	30,0	28,3	25,0	20,1
200				30,7	28,8	26,8	24,3	19,7
230				24,1	22,4	20,1	17,9	15,8
240					20,9	18,3	16,3	14,2
270					16,2	14,2	11,9	10,0
305						10,6	8,3	6,2
345							5,4	3,6
370								2,2

## Main boom 105 ft

Radius	Jib length in (ft)							
	66	135	174	213	253	292	331	371
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
70	144,8							
95	99,4	96,8						
100	93,3	90,9						
115		76,6	75,0					
125		69,2	67,6					
130		65,9	64,3	62,7				
145		57,6	56,1	54,4	52,8			
165		48,9	47,6	46,0	44,3	41,5		
180			42,5	40,9	39,3	37,6	27,7	
195			38,2	36,7	35,1	33,5	26,9	18,3
205			33,4	34,2	32,7	31,1	26,1	18,1
240				27,3	25,8	24,3	22,6	16,4
280					20,0	18,6	17,0	14,5
315						14,8	13,3	5,2
330							11,9	2,1
355								9,1

## Main boom 134 ft

Radius	Jib length in (ft)							
	66	135	174	213	253	292	331	371
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
75	129,1							
105	85,5	82,8						
120		70,3	68,5					
140		58,1	56,4	54,7				
155		51,1	49,6	47,9	46,1			
170		45,4	44,0	42,3	40,6	38,9		
175		33,4	42,4	40,7	39,0	37,3		
190			38,0	36,4	34,7	33,1	27,0	
205			34,2	32,8	31,2	29,5	26,3	17,5
210			33,1	31,7	30,1	28,4	25,9	17,5
220				29,6	28,0	26,4	24,3	17,2
250				24,4	23,0	21,3	19,6	15,7
285					18,3	16,8	15,2	12,7
325						12,8	11,3	4,7
335							10,5	2,6
365							8,2	

## Main boom 184 ft

Radius	Jib length in (ft)							
	66	135	174	213	253	292	331	371
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
90	97,0							
115	72,0	66,4						
120	68,2	65,3						
135		56,4	54,5					
150		49,4	47,6	45,7				
165		43,8	42,1	40,2	37,9			
185		37,6	36,1	34,4	32,5	29,3		
200			32,5	30,9	29,1	26,1	22,9	
215			29,4	27,8	26,0	23,3	20,2	16,5
220			28,4	26,8	25,1	22,5	19,4	16,2
225			27,5	26,0	24,3	21,7	18,7	15,6
260				20,7	19,1	17,0	14,1	11,2
300					14,6	13,1	10,3	7,6
340						9,7	7,4	3,0
345							7,0	2,3
375							4,6	

## Main boom 194 ft

Radius	Jib length in (ft)							
	66	135	174	213	253	292	331	341
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
90	95,6							
120	67,3	64,1						
135		55,4	53,5					
155		46,6	44,8	42,9				
170		41,4	39,6	37,8	35,1			
185		37,0	35,4	33,6	31,3	27,9		
190		33,4	34,1	32,4	30,2	26,9		
205			30,8	29,1	27,1	24,0	20,8	20,1
220			27,8	26,2	24,5	21,4	18,4	17,8
225			26,9	25,4	23,6	20,7	17,6	17,0
240				23,0	21,3	18,6	15,6	15,0
265				19,5	17,9	15,6	12,7	12,2
300					14,2	12,4	9,6	9,0
340						9,0	6,8	6,3
380							3,7	3,3
390								2,6

## Main boom 213 ft Main boom 223 ft

Radius	Jib length in (ft)			
	66	135	174	203
(ft)	lbs	lbs	lbs	lbs
95	86,7			
125	62,0	58,7		
140		51,0	49,0	
155		44,8	42,9	41,4
160		43,0	41,2	39,8
170		39,8	38,0	36,7
180		36,9	35,2	33,9
190		34,3	32,7	31,5
195		33,1	31,6	30,4
200			30,5	29,3
210			28,5	27,3
220			26,6	25,5
230			24,9	23,8
240				22,3
250				20,9
260				19,6

Radius	Jib length in (ft)
	125
(ft)	lbs
120,9	60,6
125	58,2
130	55,4
135	52,9
140	50,5
145	48,4
150	46,3
155	44,5
160	42,7
165	41,0
170	39,5
175	38,0
180	36,6
185	35,3

TLT 10539958 M95738 official

Capacities in 1000 lbs with luffing jib (No. 2316.xx) 273,400 lbs counterweight + 125,700 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

# Lift chart - luffing jib (No. 2316.xx)

Main boom angle 65°

## Main boom 66 ft

Radius	Jib length in (ft)							
	66	135	174	213	253	292	331	361
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
80	122,3							
100	93,0							
120		70,6						
140		53,6	52,9					
165		40,6	39,0	38,4				
185			32,6	32,4	29,9			
205			28,2	26,2	24,6			
210				24,9	23,4	21,3		
230				21,3	18,9	17,0	14,3	
240				19,5	17,1	15,3	13,5	
245					16,3	14,4	12,7	9,4
260					14,6	12,1	10,2	8,8
280					12,3	9,8	7,8	6,1
320						6,7	4,4	2,4
325							4,1	2,1
355							2,4	

## Main boom 105 ft

Radius	Jib length in (ft)								
	66	135	174	213	253	292	331	371	
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	
95	93,7								
115	74,2								
135		58,4							
155		49,2	47,4						
180		40,5	39,0	37,3					
185		33,4	37,6	35,9					
200			33,8	32,2	30,4				
220			29,6	28,1	26,4				
225				27,2	25,5	23,8			
245				23,9	22,3	20,6	18,8		
260				21,7	20,2	18,5	16,8		
270					18,9	17,3	15,6	13,1	
295					16,1	14,5	12,8	10,5	
335						10,9	9,3	5,9	
350							8,2	2,4	
375							6,2		

## Main boom 134 ft

Radius	Jib length in (ft)							
	66	135	174	213	253	292	331	371
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
110	74,3							
130	33,4							
145		50,0						
170		40,8	39,0					
190		35,2	33,6	31,7				
195		34,0	32,5	30,6				
215			28,3	26,6	24,8			
235			24,8	23,2	21,5	19,6		
260				19,7	18,1	16,3	13,8	
270				18,5	16,9	15,1	12,7	
280					15,8	14,1	11,7	8,8
300					13,8	12,1	9,9	7,2
310					12,8	11,2	9,1	6,4
345						8,5	6,3	3,8
350							5,9	3,4
385							3,3	

## Main boom 184 ft

Radius	Jib length in (ft)							
	66	135	174	213	253	292	331	
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	
126	55,6							
150	44,6							
170		34,9						
190		30,1	28,2					
215		25,3	23,5	21,6				
235			20,6	18,7	16,2			
255			18,0	16,3	14,0			
260				15,7	13,5	10,5		
280				13,7	11,7	8,8	5,8	
290				12,8	10,9	8,0	5,1	
300					10,0	7,3	4,5	
310					9,1	6,5	3,8	
320					8,2	5,7	3,1	
330					7,4	5,0	2,4	
335						4,6	2,0	
370						2,2		

## Main boom 194 ft

Radius	Jib length in (ft)								
	66	135	174	213	253	292	331	341	
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	
129,8	52,0								
155	33,4								
170		33,6							
195		27,9	26,0						
215		24,3	22,5	20,4					
220		23,5	21,7	19,8					
240			19,0	17,1	14,2				
260			16,5	14,8	12,2	9,1			
285				12,4	10,2	7,2	4,2		
290				12,0	9,8	6,9	3,9	3,4	
300					8,9	6,2	3,3	2,8	
310					8,0	5,4	2,7	2,2	
315					7,6	5,0	2,4		
320					7,2	4,6			
335					6,0	3,5			
355						2,2			

## Main boom 213 ft Main boom 223 ft

Radius	Jib length in (ft)				Jib length in (ft)	
	66	135	174	203	Radius	125
(ft)	lbs	lbs	lbs	lbs	(ft)	lbs
138,1	45,0				176,1	28,7
160	37,3				180	27,9
178		29,0			185	26,9
205		23,8	21,8		190	25,9
220		21,5	19,6	17,7	195	25,0
225		20,7	18,9	17,1	200	24,1
230		20,0	18,3	16,6	205	23,3
235			17,6	16,0	210	22,5
240			17,0	15,5	215	21,7
250			15,9	14,5	220	21,0
260			14,8	13,6	225	20,2
265			14,3	13,1		
280				11,7		
285				11,3		
290				10,8		
295				10,3		

TLT 10539958 M95738 official

Capacities in 1000 lbs with luffing jib (No. 2316.xx) 273,400 lbs counterweight + 125,700 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

# Lift chart - luffing jib (No. 2316.xx)

Main boom angle 45°

## Main boom 66 ft

Radius	Jib length in (ft)						
	66	135	174	213	253	292	331
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs
115	73,8						
170		43,3					
185		38,8					
200			33,5				
225			27,8				
235				24,1			
260				18,8			
265					15,7		
290					12,6		
300					11,4	9,2	
330						6,5	3,7
335						6,1	3,6
360							2,1

## Main boom 105 ft

Radius	Jib length in (ft)						
	66	135	174	213	253	292	331
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs
137,5	53,1						
145	49,7						
194		31,5					
215		27,3					
227			23,6				
250			20,4				
260				17,4			
290				14,3			
295					12,2		
325					9,7	7,9	
360						5,2	2,7
365						4,8	2,4
370							2,1

## Main boom 134 ft

Radius	Jib length in (ft)					
	66	135	174	213	253	292
(ft)	lbs	lbs	lbs	lbs	lbs	lbs
158,4	39,7					
165	37,7					
215		23,4				
235		20,5				
249			17,1			
270			14,8			
280				12,0		
310				9,7		
315					7,1	
345					4,9	2,2

## Main boom 184 ft

Radius	Jib length in (ft)			
	66	135	174	
(ft)	lbs	lbs	lbs	
193,2	22,7			
200	21,6			
250		12,0		
260		11,2		
265		10,8		
270		10,3		
285			6,4	
295			5,6	
300			5,3	
305			4,9	

## Main boom 194 ft

Radius	Jib length in (ft)		
	66	135	174
(ft)	lbs	lbs	lbs
200,2	19,9		
210	18,5		
260		9,3	
275		8,0	
290			4,1
315			2,6

## Main boom 213 ft Main boom 223 ft

Radius	Jib length in (ft)	
	66	135
(ft)	lbs	lbs
214,1	14,7	
220	14,1	
225	13,5	
275		4,2
285		3,6
290		3,2


Jib length in (ft)	
Radius	125
(ft)	lbs
269,4	3,3
270	3,3
275	3,0
280	2,7
285	2,4

TLT 10539958 M95738 official

Capacities in 1000 lbs with luffing jib (No. 2316.xx) 273,400 lbs counterweight + 125,700 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

# Working range main boom 88° - 30°

Fixed jib (No.0906.21) offset 30°

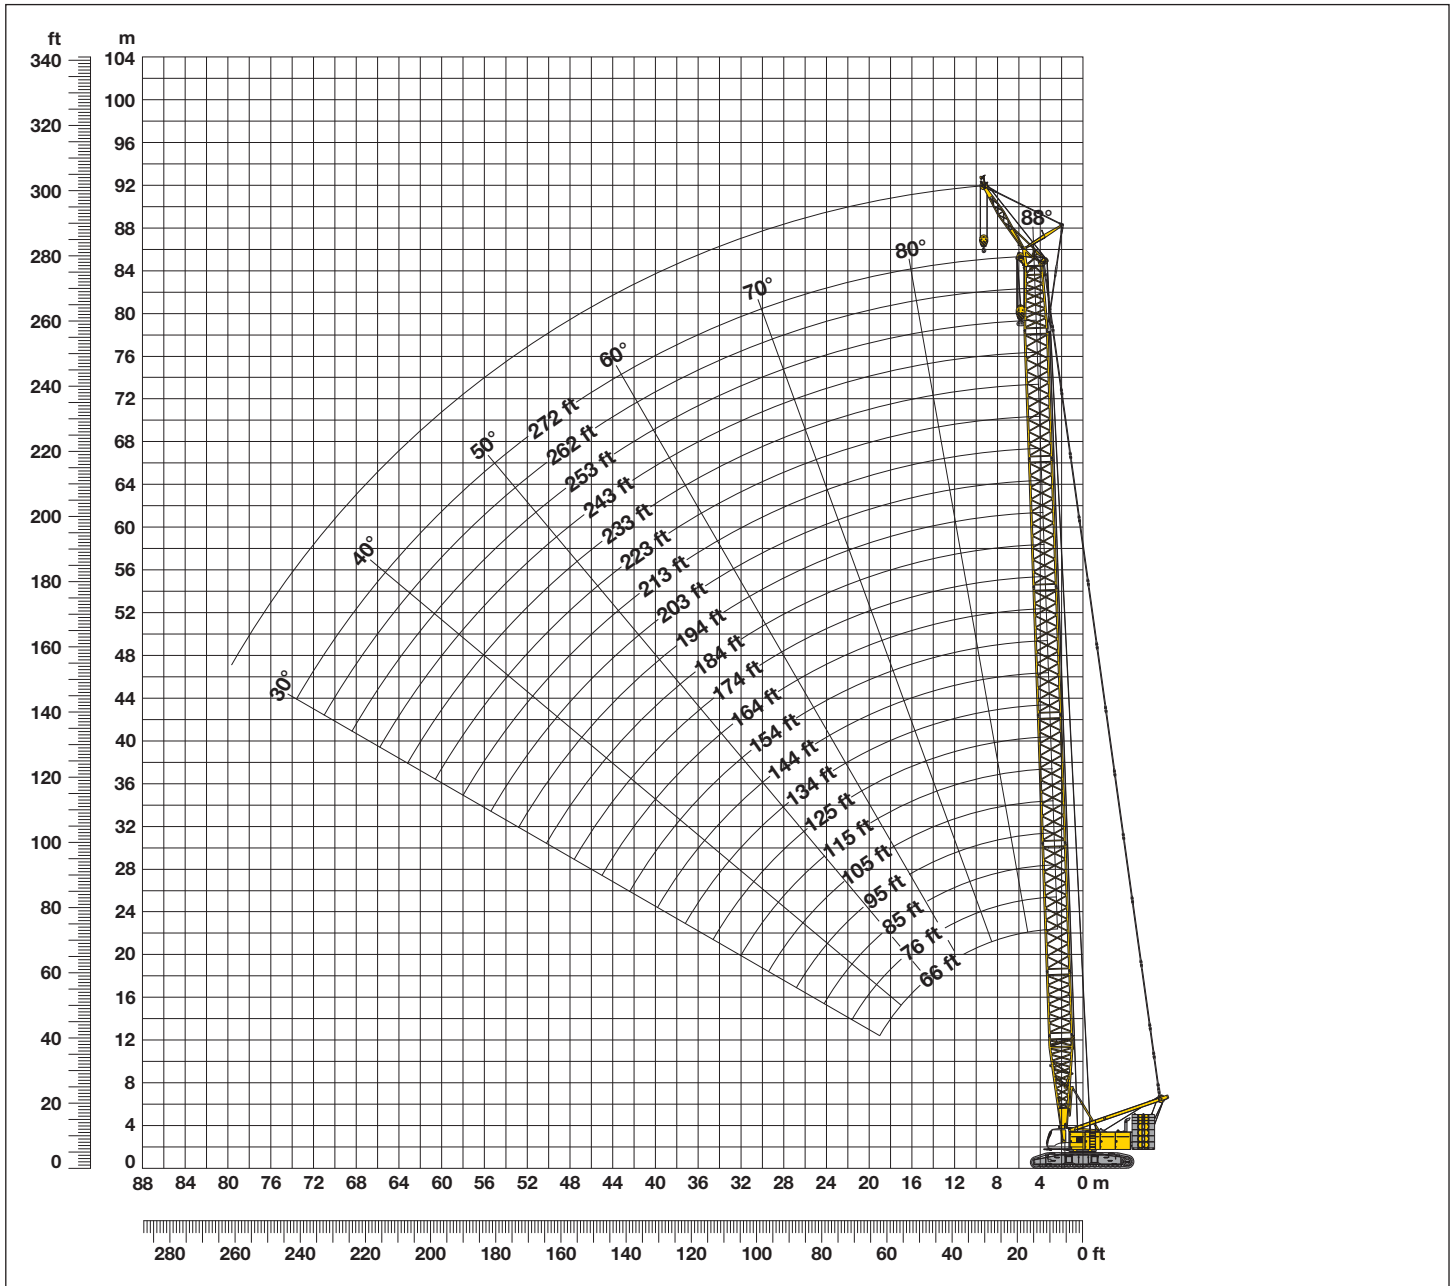

## Main boom configuration (No. 2821.xx)

Configuration for boom lengths between 66 ft and 272 ft

	Length	Amount of boom extensions																					
Boom foot	32.8 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Boom insert	9.8 ft	1		1		1		1		1		1		1		1		1		1			
Boom insert	19.7 ft		1	1		1	1	1		1	1		1	1		1	1		1	1			
Boom insert	39.4 ft				1	1	1	1	2	2	2	3	3	3	3	4	4	4	4	5	5	5	
Boom head	23 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Boom length (ft)		66	76	85	95	105	115	125	134	144	154	164	174	184	194	203	213	223	233	243	253	262	272

\*Actual lengths of boom sections are metric (e.g. 3m, 6m, 7m, 12m). The figures shown above are approximate conversions to feet.

# Lift chart - fixed jib 7 m (No. 0906.21) offset 30°

**237,400 lbs counterweight and 125,700 lbs carbody counterweight**

## Main boom 66 ft

Radius (ft)	lbs
45	142,2
50	135,3
55	128,3
60	123,3
65	119,2
70	115,1
75	111,8
80	109,8
85	108,2

## Main boom 85 ft

Radius (ft)	lbs
40	157,2
45	150,3
50	143,1
55	137,9
60	131,6
65	126,4
70	122,8
75	119,5
80	116,2
85	111,6
90	103,3
95	95,9
100	89,4
105	83,4

## Main boom 105 ft

Radius (ft)	lbs
40	162,6
50	149,4
60	138,3
70	128,9
75	125,0
80	120,6
85	111,1
90	102,8
95	95,5
100	89,0
105	83,2
110	78,0
115	73,2
120	68,8

## Main boom 125 ft

Radius (ft)	lbs
35	173,7
40	166,7
50	154,3
60	143,4
70	135,2
80	119,7
90	101,9
100	88,1
110	77,1
120	68,0
125	64,2
130	60,5
135	57,2
140	54,0

## Main boom 144 ft

Radius (ft)	lbs
30	184,0
40	169,7
50	157,2
60	148,3
70	139,6
80	118,9
90	101,1
100	87,3
105	81,5
110	76,2
115	71,5
125	63,4
140	53,4
155	45,3

## Main boom 164 ft

Radius (ft)	lbs
30	185,2
40	171,6
50	160,5
60	152,4
70	141,0
80	117,9
90	100,0
100	86,2
110	75,1
120	66,1
130	58,7
140	52,3
160	42,0
175	33,4

## Main boom 184 ft

Radius (ft)	lbs
27,2	187,3
30	186,4
40	174,0
50	163,5
60	154,2
70	141,1
80	117,1
90	99,1
100	85,2
120	65,3
140	51,3
160	41,0
180	33,1
190	29,8

## Main boom 203 ft

Radius (ft)	lbs
27,9	186,2
30	186,2
40	175,8
50	166,1
60	156,7
70	140,2
80	116,0
100	84,1
120	64,1
140	50,1
160	39,8
180	31,9
200	25,6
205	24,2

## Main boom 223 ft

Radius (ft)	lbs
28,6	185,1
30	185,1
40	176,8
50	167,1
60	155,1
80	115,1
100	83,1
120	63,0
140	49,0
160	38,7
180	30,8
200	24,5
220	19,4
225	18,2

## Main boom 243 ft

Radius (ft)	lbs
29,3	183,8
30	183,8
40	177,2
50	168,7
60	157,6
80	114,1
100	81,9
120	61,8
140	47,7
160	37,4
180	29,5
200	23,2
220	18,1
240	13,8

## Main boom 262 ft

Radius (ft)	lbs
30	181,7
40	176,5
50	167,9
60	161,7
80	113,2
100	80,9
120	60,7
140	46,5
160	36,2
180	28,3
200	22,1
220	16,9
240	12,7
260	8,9

## Main boom 272 ft


Radius (ft)	lbs
30,3	180,5
40	176,4
60	161,7
80	112,6
100	80,3
120	60,1
140	45,9
160	35,6
180	27,7
200	21,4
220	16,3
240	12,1
260	8,0
265	7,0

TLT 10539958 M95738 official

Capacities in metric tons with fixed jib (No. 0906.21) 237,400 lbs counterweight + 125,700 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

# Working range main boom 88° - 30°

Fixed jib (No. 1507.20) offset 30°

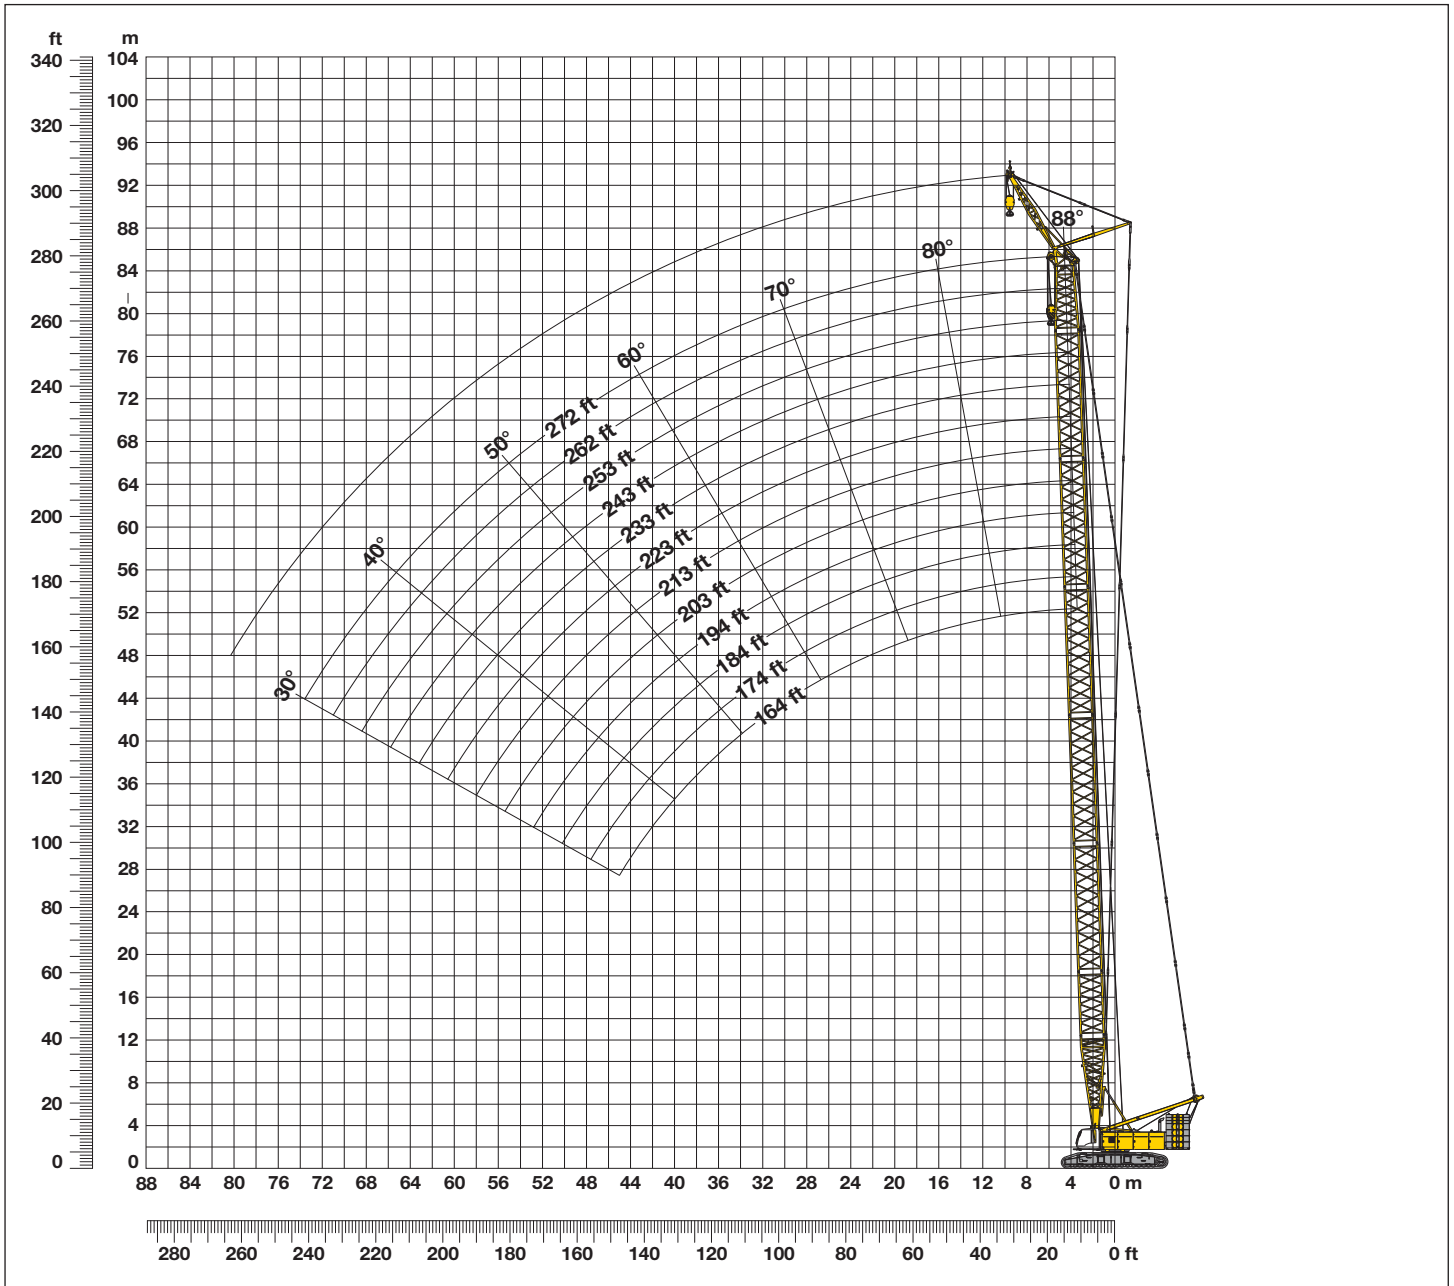

## Main boom configuration (No. 2821.xx)

Configuration for boom lengths between 164 ft and 272 ft

Length	Amount of boom extensions																
Boom foot 32.8 ft		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Boom insert 9.8 ft		1		1		1		1		1		1		1		1	
Boom insert 19.7 ft		1			1	1		1		1		1		1		1	
Boom insert 39.4 ft		2	3	3	3	3	4	4	4	4	5	5	5				
Boom head 23 ft		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Boom length (ft)		164	174	184	193	203	213	223	233	243	253	262	272				

\*Actual lengths of boom sections are metric (e.g. 3m, 6m, 7m, 12m). The figures shown above are approximate conversions to feet.

# Lift chart - fixed jib 8 m (No. 1507.20) offset 30°

**273,400 lbs counterweight and 125,700 lbs carbody counterweight**

## Main boom 164 ft

Radius (ft)	lbs
26,2	257,9
30	257,9
40	251,6
50	220,3
60	175,2
70	141,2
80	117,2
90	99,3
100	85,4
110	74,3
120	65,3
140	51,4
160	41,1
175	34,9

## Main boom 174 ft

Radius (ft)	lbs
26,6	257,9
30	257,9
40	247,5
50	219,4
60	174,9
70	140,9
80	116,8
90	98,9
100	85,0
120	65,0
140	51,1
160	40,8
180	32,8
185	31,1

## Main boom 184 ft

Radius (ft)	lbs
27	257,9
30	257,9
40	246,0
50	217,7
60	174,5
70	140,4
80	116,3
90	98,3
100	84,4
120	64,4
140	50,4
160	40,1
180	32,2
195	27,3

## Main boom 193 ft

Radius (ft)	lbs
27,4	257,9
30	257,9
40	247,4
50	216,2
60	174,1
70	140,0
80	115,8
90	97,8
100	83,9
120	63,8
140	49,8
160	39,5
180	31,6
200	25,3

## Main boom 203 ft

Radius (ft)	lbs
27,8	257,9
30	257,9
40	251,2
50	211,9
60	173,8
70	139,5
80	115,3
100	83,2
120	63,2
140	49,1
160	38,8
180	30,9
200	24,6
210	21,8

## Main boom 213 ft

Radius (ft)	lbs
28,2	257,9
30	257,9
40	257,7
50	209,4
60	173,4
70	139,1
80	114,9
100	82,8
120	62,7
140	48,7
160	38,4
180	30,5
200	24,2
220	19,0

## Main boom 223 ft

Radius (ft)	lbs
28,5	257,2
30	256,7
40	251,7
50	206,4
60	172,1
80	114,4
100	82,2
120	62,1
140	48,0
160	37,6
180	29,8
200	23,5
220	18,3
225	17,1

## Main boom 233 ft

Radius (ft)	lbs
28,9	243,6
30	243,6
40	239,2
50	202,0
60	170,5
80	113,9
100	81,6
120	61,5
140	47,4
160	37,0
180	29,2
200	22,9
220	17,7
235	14,4

## Main boom 243 ft

Radius (ft)	lbs
29,3	223,1
30	223,1
40	217,8
60	167,7
80	113,3
100	81,0
120	60,8
140	46,7
160	36,3
180	28,4
200	22,1
220	17,0
240	12,7
245	11,7

## Main boom 253 ft

Radius (ft)	lbs
29,7	212,7
30	212,7
40	212,7
60	168,7
80	112,9
100	80,5
120	60,3
140	46,2
160	35,8
180	27,9
200	21,6
220	16,5
240	12,2
255	9,3

## Main boom 262 ft

Radius (ft)	lbs
30	196,3
40	193,6
50	180,0
60	165,4
80	112,4
100	79,9
120	59,7
140	45,5
160	35,1
180	27,2
200	20,9
220	15,8
240	11,5
260	7,2

## Main boom 272 ft

Radius (ft)	lbs
30,4	183,7
40	181,2
60	159,3
80	111,9
100	79,4
120	59,1
140	44,9
160	34,5
180	26,6
200	20,3
220	15,1
240	10,8
260	6,2
270	4,2

TLT 10539958 M95738 official

Capacities in metric tons with fixed jib (No. 1507.20) 237,400 lbs counterweight + 125,700 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

---

**Liebherr-Werk Nenzing GmbH**  
P.O. Box 10, A-6710 Nenzing/Austria  
Tel.: +43 50809 41-473  
Fax: +43 50809 41-499  
crawler.crane@liebherr.com  
www.liebherr.com

**Liebherr Nenzing Crane Co.**  
7075 Bennington Street, Houston, TX 77028-5812  
Phone: +1 713 636 4050  
Fax: +1 713 636 4051  
crawler.crane@inc.liebherr.com  
www.liebherr.com